


更改 REV	出图日期 DATE	设变内容 MODIFICATION	修改 DRAWN
A	2018/05/04		

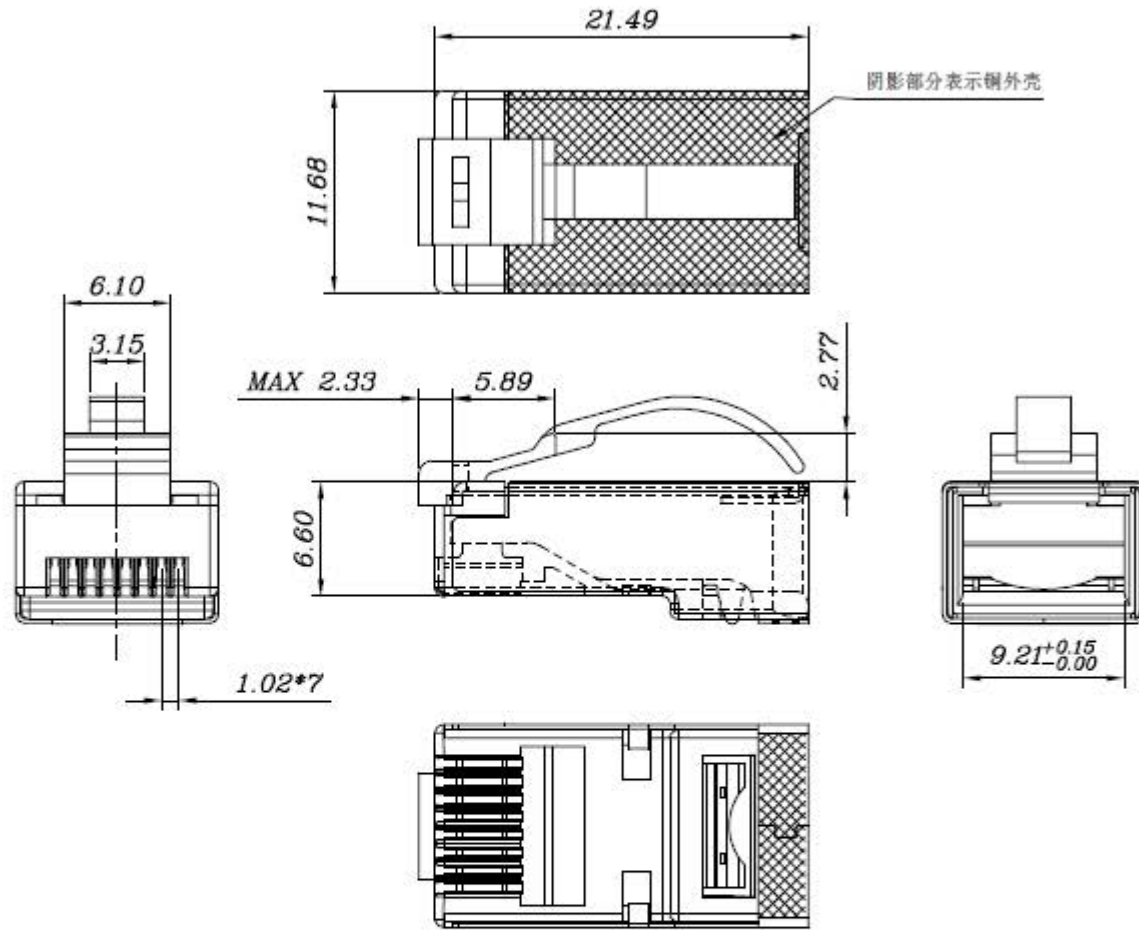

SPECIFICATIONS

1. ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC. 60 SEC.
 INSULATION RESISTANCE: 500 MΩ
 CONTACT RESISTANCE: 20mΩ MAX
 OPERATING AMBIENT TEMPERATURE: -20°C ~ 75°C

2. MECHANICAL:
 STRAIN RELIEF: 20 POUND MIN.
 DURABILITY: 1200 MATING CYCLES.

3. MATERIAL:
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE
 CONTACT BLADE: COPPER ALLOY
 GOLD PLATING: 3u"-50u", ARE AVAILABLE
 SHIELDED SHELL: COPPER ALLOY.

4. USAGE:
 SUITABLE FOR STRANDED & SOLID WIRE 23AWG ~ 26 AWG.

BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC
Drawing									
Mark					✓				
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark						✓	Mark	✓	

ITEM NO.	21.17.3091		
ROLINE Modular RJ45 Arch Latch Plug, Cat. 6, STP			
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL PC		
.X±0.20	.X°±5°		
.XX±0.10	.XX°±2°		
审核 APPROVAL	核对 CHECKED	制图 DRAWN	比例 SCALE 2/1
		Zach	张数 SHEET 1/1
			角法 PROJ
			更改 REV A

1

2

3

4

5

6

ST-DR-009A

7