


# ROLINE RS-232 to RS-422/485 Converter, Din Rail, self powered

<b>Product No.</b>	12.02.1008
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	12.02.1008
<b>EAN (single piece)</b>	7611990198665

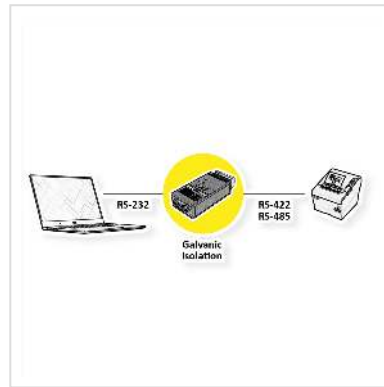

Converts RS-422 or RS-485 devices to a RS-232 port

- Connectors: RS-232: DB9 Female, RS-422/485: 7-pin terminal block
- High speed baud rate up to 921.6 Kbit/s
- Data transfer rate of up to 115.2 Kbit/s at 1.2 km
- Built-in Terminator 120 Ohm by DIP switch settings
- Signals for RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Signals for RS-422/4-wire: Tx+, Tx-, Rx+, Rx-, GND
- Signals for RS-485/2-wire: D+, D-, GND
- Protection: 15 KV ESD protection for all signals, 600 W surge protection for RS-422/485 signals
- For DIN rail mounting (DIN rail kit included) or desktop use
- Hardware solution, no software required
- RS-232 port powered technology, optional: Power input 10~30 VDC
  
- Contents: Converter, manual

## Technical specifications

Manufacturer	ROLINE
Product group	Adapters, Terminators, Converters
Product type	Serial interface converter
Colour	black
Scope of delivery	Converter, manual

Weight	76 g
Height of packaging (single piece)	40 mm
Width of packaging (single piece)	140 mm
Depth of packaging (single piece)	200 mm
Package weight (single piece)	0.14 kg