


ROLINE ProSecure II 3000 RM2U - Online UPS, 19" Rack version

Product No.	19.40.1092
Manufacturer	ROLINE
Manufacturer No.	19.40.1092
EAN (single piece)	7611990154920

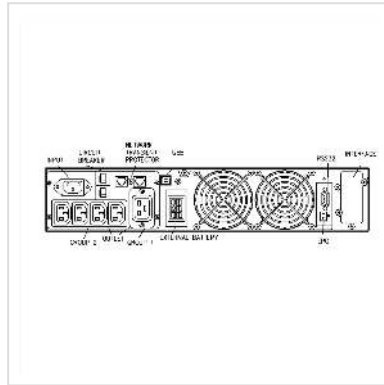

The ROLINE ProSecure Series - for optimum power protection is a truly state of the art online double conversion UPS, ideal for all essential computer systems and servers. Protects against: power failure, power sag, power surge, under voltage, over voltage, switch transient, line noise, frequency variation, harmonic distortion.

Product features:

- Cold start function (DC power on)
- Lightning and surge protection
- Battery replacement warning
- Emergency Power Off function
- Battery remain time display
- LCD display front panel
- Power factor correction
- Support USB communication
- Multiple language LCD display
- On line output voltage selected
- Hot swappable battery by user
- True on-line technology provides all power protection
- Pure sine-wave output with less than 3% THD
- Fully digitized microprocessor controlled
- Short Circuit and overload protection
- Advanced

management (ABM)

- Automatic battery charge in UPS off mode

- Automatic diagnostics & battery check
- RS-232 communication port with monitoring software
- Network/fax/modem surge protection
- Extended back up time with battery pack
- Load segmentation receptacles controllable
- High efficiency mode selectable
- Fan speed auto control when loads varies
- UPS Management Software : Windows NT/ 2k / XP / 7 / 8 /Server 2003 / 2008 / 2012 x86/x64,
MAC OS X (Intel) 10.6.x, 10.7.x, 10.8.x Mountain Lion, 10.9.x MavericksMAC OS, LINUX
- Contents: UPS, cable set, UPS management software

Technical specifications

Manufacturer	ROLINE
Product group	UPS
Product type	UPS Online, Rackmount
Colour	grey
Scope of delivery	USV, Cable set, Software
Classification (IEC 62040-3)	VFI-SS-111
UPS technology	Online
Power class	2000 ... 3000 VA
Output (VA/W)	3000 / 2100
Efficiency	95 %
Backup time	5 min
Backup time full/half-load	5 / 9 min
Dimensions (HxWxD)	88 x 428 x 610; 2 HE
Mounting form	Rackmount
Voltage (input)	160-230V
Voltage (output)	230V
Output voltage regulation	+ - 2%

Frequency	50Hz +- 3%
Connector type (input)	IEC 320 C20
Outputs	5
Connector type (output)	4 x IEC 320 C13; 1 x IEC 320 C19
Phase in/output	230V/230V / 50Hz
Over current protection	EMI,- RFI-Filter
Max. quantity of delay expansion units	2
Delay expansion unit	2
Slots for adapter card	1
Slot for adapter card	1
Interface	RS232, USB
RS-232 Interface	Yes
USB 2.0 Interface	Yes
Hot swap batteries	Yes, front side
Bypass	Automatic + manual
Additional over current protector	No
Activity	Display
Activity LED	5
Activity Display	LCD
incl.Management Software	Window
Internal cooling	Active, fan
Ambient temperature	0-40C
Conformity	CE
Height	88 mm
Width	428 mm
Depth	610 mm
Weight	32 kg

Back up time

Power rating (VA / W)	with 0 / 1 / 2 Battery pack (min)
3000/2100	5 / 13 / 28
2700/1890	6 / 16 / 34
2400/1680	7 / 20 / 40
2100/1470	9 / 25 / 48
1800/1260	11 / 30 / 56
1500/1050	14 / 37 / 66
1200/840	19 / 45 / 85
900/630	27 / 60 / 140
600/420	40 / 100 / 220
300/210	60 / 270 / 400